
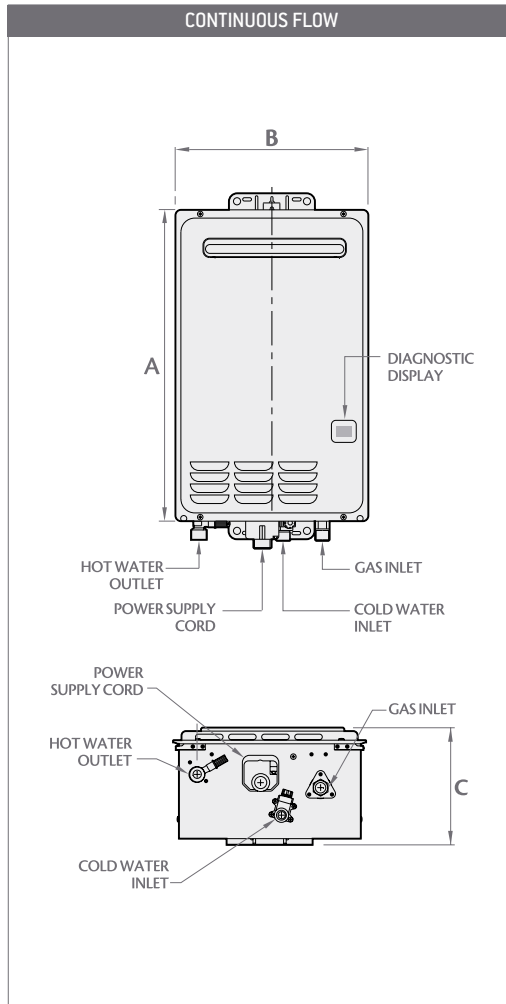
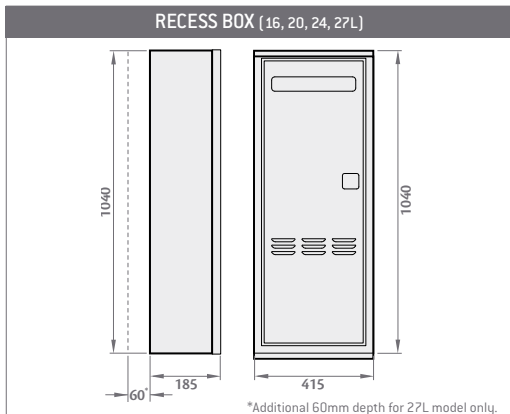


GAS CONTINUOUS FLOW

	874016NFZ/LFZ	874020NFZ/LFZ	A871024NFZ/LFZ	874027NFZ/LFZ
L/Min @25°C Rise	16L/Min	20L/Min	24L/Min	27L/Min
Gas Input Max.	126 MJ/Hr	153 MJ/Hr	188 MJ/Hr	205 MJ/Hr
Gas Type	NG or LPG	NG or LPG	NG or LPG	NG or LPG
Gas Connection	R 3/4 / 20	R 3/4 / 20	R 3/4 / 20	R 3/4 / 20
Water Pressure (kPa)	140-1000	140-1000	140-1000	140-1000
Minimum Flow Rate	2.7L/Min	2.7L/Min	2.7L/Min	3.0 L/Min
Cold Water Connection	R 3/4 / 20	RP 3/4 / 20	RP 3/4 / 20	RP 3/4 / 20
Hot Water Connection	R 3/4 / 20	RP 3/4 / 20	RP 3/4 / 20	RP 3/4 / 20
Approx. Weight	21kg	21kg	21kg	24kg
Freeze Protection	Natural Gas - Standard	Natural Gas - Standard	Natural Gas - Standard	Natural Gas - Standard
	LPG Standard	LPG Standard	LPG Standard	LPG Standard
Unit Height (mm) A	520	520	565	568
Unit Width (mm) B	350	350	350	351
Unit Depth (mm) C	163	163	205	226

CONTINUOUS FLOW ACCESSORIES	PART NUMBER
Recess Box	316383
Pipe Cover	316381
EZ Link Cable	290141
STANDARD TEMPERATURE CONTROLLERS	
Kitchen	A299850
Bathroom 1	A299851
Bathroom 2	A299852
DELUXE TEMPERATURE CONTROLLERS	
Kitchen	A299861
Bathroom 1	A299862
Bathroom 2	A299863

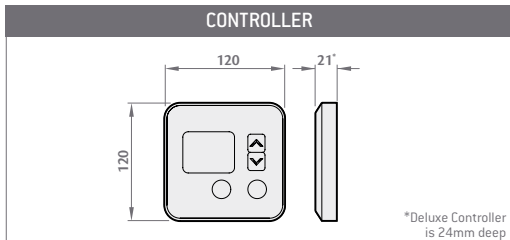

SATURN GAS BOILER

	201KCA	301KCA
Condensing Heating Output	24 - 11 kW	35 - 15 kW
Input	85 MJ/Hr	125 MJ/Hr
Max Heating Water Pressure	300 kPa	300 kPa
Adjustable Temperature Heating	30 - 80 °C	30 - 80 °C
Total Volume Expansion Tank	7.0 L	10.0 L
Expansion Tank Pre Charge	100 kPa	100 kPa
Domestic Hot Water Output @ 25°C rise (without storage)	14 L/min	20 L/min
Min Working Pressure for DHW	20 kPa	20 kPa
Min Working Flow Rate for DHW	2.3 L/min	2.3 L/min
Max Domestic Hot Water Pressure	1750 kPa	1750 kPa
Adjustable Domestic Hot Water Temperature	35 - 60 °C	35 - 60 °C
Electrical Supply	230V - /50Hz	230V - /50Hz
Installation Type	Internal Wall Mounting	Internal Wall Mounting
Connecting Dia. (mm)	Heating Water Connection	350
	Domestic Hot Water Connection	15
	Gas Connection	20
Physical Dimensions (mm)	495x248x695	515x248x715
Weight	34 Kg	38 Kg
Gas Type	LPG & NG	LPG & NG
Warranty*	1 year parts and labour plus 5 years on Heat Exchanger	

MAINS PRESSURE CALORIFIER

Rheem Mains Pressure Calorifier	323180C5	313300C5
Initial Storage Capacity	180 Litre	300 Litre
Approx. Weight Empty	72 Kgs	102 Kgs
Relief Valve Setting	1000 kPa	1000 kPa
Water Connections	RP _ / 20	RP _ / 20
Element Rating	3 kW	3 kW
Warranty*	1 year parts and labour plus 5 years on Heat Exchanger	

